



Electric Material-storage System

In the case of rising energy costs, the energy saving issue has been more and more regarded, by which industrial machinery application changes also followed.

In the case of needing large torque, the hydraulic motor is no longer the only one which can be used and the electric material-storage system becomes another new option, with the composition divided into two kinds:

- Reducer + permanent magnet synchronous servo motor + drive
- Direct drive DD motor + drive

The system has the following advantages:

- The original hydraulic system specifications can be reduced in selection.
- Energy consumption only occurs in action, making the machine more energy-efficient.
- Due to independent material storage, the machine can do two actions simultaneously so that the production cycle can be shortened.
- Precise and stable speed control.



Electric Material-storage System Specification Table (with Reducer)

Model No.	Torque N-m	Maximum speed rpm
CRS1-22 / 22-112 / 8-380-DA	700	300
CRS1-30 / 30-112 / 8-380-DA	930	308
CRS1-37 / 37-125 / 8-380-DA	1316	270
CRS1-45 / 45-140 / 10-380-DA	2212	188
CRS1-75 / 75-160 / 10-380-DA	3066	223
CRS1-100 / 110-180 / 12-380-DA	5656	148
CRS1-120 / 132-200 / 12-380-DA	7000	170
CRS1-175 / 200-225 / 12-380-DA	10038	170
CRS1-160 / 200-225 / 16-380-DA	11998	130
CRS1-200 / 200-250 / 20-380-DA	18000	110
CRS1-266 / 315-280 / 20-380-DA	24000	90
CRS1-333 / 355-320 / 20-380-DA	29400	90
CRS1-400 / 450-320 / 20-380-DA	36400	99

* The above specifications are for reference only, it can be adjusted for customization according to customer demands.



Energy Saving | Power Saving | New Revolution

SERVO SYSTEM

Precise Hydraulic Power System
of the Great Leap Forward

CHYN RONG MACHINERY INDUSTRIAL CO., LTD.

Taiwan Headquarter

No. 615, Yanxin St., Yongkang Dist.,
Tainan City 71047, Taiwan
Tel. +886-6-253-7951
Fax. +886-6-242-7683
E-mail. chynrong@ms27.hinet.net

Taichung Branch

No. 59, Minquan St., Wuri Dist.,
Taichung City 414, Taiwan
Tel. +886-4-2336-0063
Fax. + 886-4-2336-0083
E-mail. cr723@ms16.hinet.net

Taipei Office

No. 118-11, Qionglin S. Rd., Xinzhuang
Dist., New Taipei City 242, Taiwan
Tel. +886-2-2207-0855
Fax. + 886-2207-0856
E-mail. mizu.tw@msa.hinet.net

CHUNG SHAN CHUNG CHYN MACHINERY LTD.

China Branch

No. 38 Dong Chen Rd., Dong Shen
Town, Chung Shan City, Canton
Tel. +86-760-2282-2910
Fax. + 86-760-2282-2920
E-mail. admin@zhongqen.com.cn

Kunshan Branch

Building B, No. 299, Youbi Road, Zhoushi
Town, Kunshan City, Jiangsu Province
Tel. +86-512-5766-9560-61
Fax. + 86-512-5516-1986
E-mail. xygyj2004@hotmail.com

Ningbo Office

Room 402, Building 7, Longshun
Xinyuan, Henghe Road, Xinqizhen,
Beilun, Ningbo City
Tel. +86-574-8683-2978
Fax. + 86-574-86881247



DILIGENCE AND HONESTY MOLD OUR GLORY
CHYN RONG | www.chynrong.com

Product Feature Description

Permanent Magnet Synchronous Servo Motor

- Three-phase industrial independent fan specially designed to avoid steering problems.
- Silo body design to reinforce steel and reduce motor distortion.
- Perfect dynamic balancing properties.
- With the motor up to the IP54 protection class and the H-class insulation.
- Using the special bearing to ensure long service life.
- Magnet through magnetization, baking, and testing, to strictly control quality.
- Built-in feedback interface and temperature protection contact.
- The electric hopper can choose to use the DD motor.
- In accordance with the needs, the induction servo motor can be chosen.



High-performance Internal Gear Pump

- High pressure: the highest reaches 300 kgf / cm².
- Small noise: being fully consistent with the work environment requirements for low volume.
- Low pulse and running smoothly.
- Radial and axial pressure compensation with ultra-high efficiency.
- Excellent suction with a wide range of hydraulic oil viscosity.
- Wide flow range: from 3.5 c.c to 125 c.c in the single pump.
- It can be used in the link of multi-pump and applied in multi-loop.
- Optional Eckerle and Voith high pressure internal gear pump imported from Germany.



ABB/WEG Drive


- The inverter has excellent lightweight appearance and consistent design.
- Strong brake function.
- Built-in simple internal PLC programming function can replace the small PLC.
- It can control traditional asynchronous motors, asynchronous servo motors, and permanent magnet synchronous motor, with high compatibility.
- Direct Torque Control (DTC): precise, dynamic and static speed and torque control to reduce the vibration generated by rotation to minimum and also inhibit noise.
- A variety of optional expansion cards.
- Independent pluggable memory unit for easy replacement.
- In accordance with the needs, the Taiwan-made drive can be chosen.



The Advantages of the Hydraulic Servo System

Effective Energy Savings

In the comparison of three systems, the hydraulic servo system combines with the drive, by the instructions sent by the host controller, according to the actual needs, making the motor output torque and speed without unnecessary waste and with the best effect.

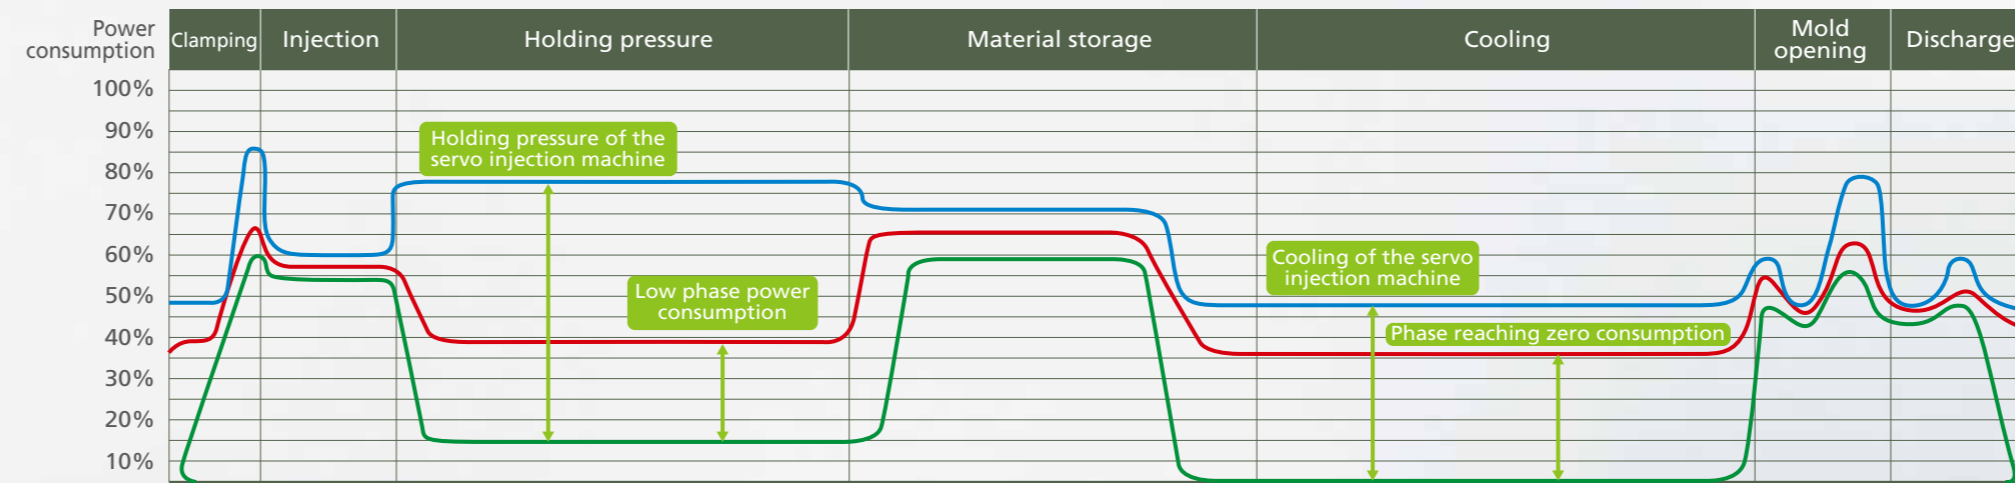


Low Loss, High Efficiency, and Low Noise

Since in synchronous motor design, silicon steel sheets are adopted so that in operation, the system can reduce iron losses, exciting noises in drive control, and energy loss, making the motor produce less heat and the bearing life can effectively extend.



High Response & Precision

Its synchronous motor adopts magnet design, with small surge current and high motor efficiency, without slip problems. Through the excellent driving characteristics of the ABB drives, there are an effective control, high response, and high precision, making machine action achieve the requirements of stability and high reproducibility.

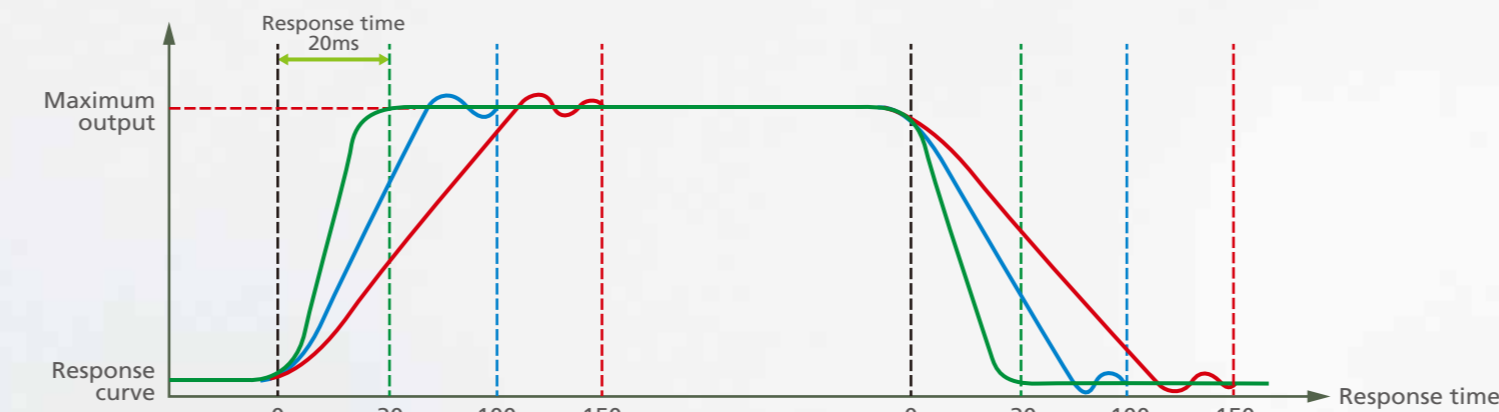

Hydraulic Servo System Specification Table

Model No.	Maximum flow L / min	Maximum pressure kg / cm ²
CRS1-20 / 20-32 / XX-380-A1	70	140
CRS1-25 / 25-40 / XX-380-A1	88	140
CRS1-30 / 30-50 / XX-380-A1	110	140
CRS1-40 / 40-64 / XX-380-A1	140	140
CRS1-50 / 50-80 / XX-380-A1	176	140
CRS1-50 / 50-50 / 40-380-A1	198	140
CRS1-60 / 60-100 / XX-380-A1	220	140
CRS1-80 / 75-64 / 50-380-A1	250	140
CRS1-80 / 100-100 / 32-380-A1	290	140
CRS1-100 / 100-100 / 50-380-A1	330	140
CRS1-100 / 100-100 / 64-380-A1	360	140
CRS1-130 / 125-100 / 80-380-A1	396	140
CRS1-130 / 150-100 / 100-380-A1	440	140

* The above specifications are for reference only, it can be adjusted for customization according to customer demands.

Complete Machine-changing Supporting Programs & Application Examples in Industry

Machine-changing Processes

